



Smooth seed beds with easy-to-use, clod-busting Yanmar cultipacker.

To rapidly perfect acres of seedbed, cultipackers are the time-tested solution. Cultipackers cover lots of ground in a short time, crushing dirt clods, and reducing air pockets in the soil. Including a cultipacker in your fieldwork kit helps you achieve better seed-soil contact that leads to faster, stronger germination, higher crops yields and more beautiful lawns.

With three models designed for durability, Yanmar cultipackers feature notched cast-iron wheels that produce just the right effect on a wide range of soil types.

Attach the pull-type 48" YCU48 with ball hitch to your small tractor, UTV or ATV, or choose the 72" YCU72 or 84" YCU84 with 3-point hitch for 20-75hp tractors.

Every Yanmar tool is designed to meet our commitment to put back into the land more than we take out of it.

PROPER FIELD PREPARATION MEANS BETTER GERMINATION



NOTCHED, CAST IRON CULTIPACKER WHEELS

- Improve seed-to-soil contact, gently firm soil around seeds
- Ideal for shallow seed placement
- Help retain moisture, eliminate air pockets
- Greased triple-sealed bearings maintain and extend service life
- Mud scrapers optional on YCU48, standard on YCU72 & YCU84



ATTACHMENT AND TRANSPORT OPTIONS

- 48" YCU48 with 2" ball hitch for UTV/ATV or under 30 hp tractors
- 72" YCU72 or 84" YCU84 feature standard 3-pt hitch for tractors from 20-75hp. Optional tow kit to use with non-3-point-hitch vehicles.
- Quickly change from field to transport, YCU48 features flip-over, pull-type hitch. Tow tires and weight rack are standard equipment.
- Models YCU72/84 parking stand is standard.
- Tow kit option available to convert YCU72 & YCU84 to pull-type cultipackers

STANDARD DUTY CULTI- PACKER

FEATURES

Available in 48-, 72- and 84-inch widths


48-inch is standard with tow hitch for use with UTVs, ATVs, garden tractors & sub-compact tractors

72- & 84-inch models are standard equipped for tractor 3-point hitch. Or add optional tow kit to use with non-3-point-hitch vehicles.

48-inch model & tow-hitch-equipped 72- & 84-inch models flip over for transport



MODEL	STANDARD DUTY		
	YCU48	YCU72	YCU84
Tractor Engine HP	Up to 30 HP	20-75 HP	
Hitch Type	Pull-type	3-pt hitch or pull-type with optional tow kit	
Hitch Category	2" ball	Cat 1 & 2	
Working Width	48" (1219.2 mm)	72" (1828.8 mm)	84" (2133.6 mm)
Overall Width	67" (1701.8 mm)	82" (2082.8 mm)	94" (2387.6 mm)
Length	58" (1219.2 mm) with tongue	15.75" (400 mm) 3-pt hitch; 91.5" (2324 mm) with tongue option	
Weight / Shipping Weight	275 lbs (124 kg) / 289 lbs (131 kg)	371 lbs (168.2 kg) / 390 lbs (176.9 kg)	420 lbs (190.5 kg) / 439 lbs (199.1 kg)
Axle Size	1.75" (44.5 mm)		
Cultipacker Wheel Diameter	9.5" (241.5 mm)		
Cultipacker Wheel Quantity	21	32	37
Greasable, Triple-sealed Bearings	Yes		
Transport Tires (pneumatic)	Standard (10" x 3.25")	Optional (10" x 3.25")	
Weight Rack	Standard	N/A	
Parking Stand	N/A	Standard	
Mud Scrapers	Optional	Standard	

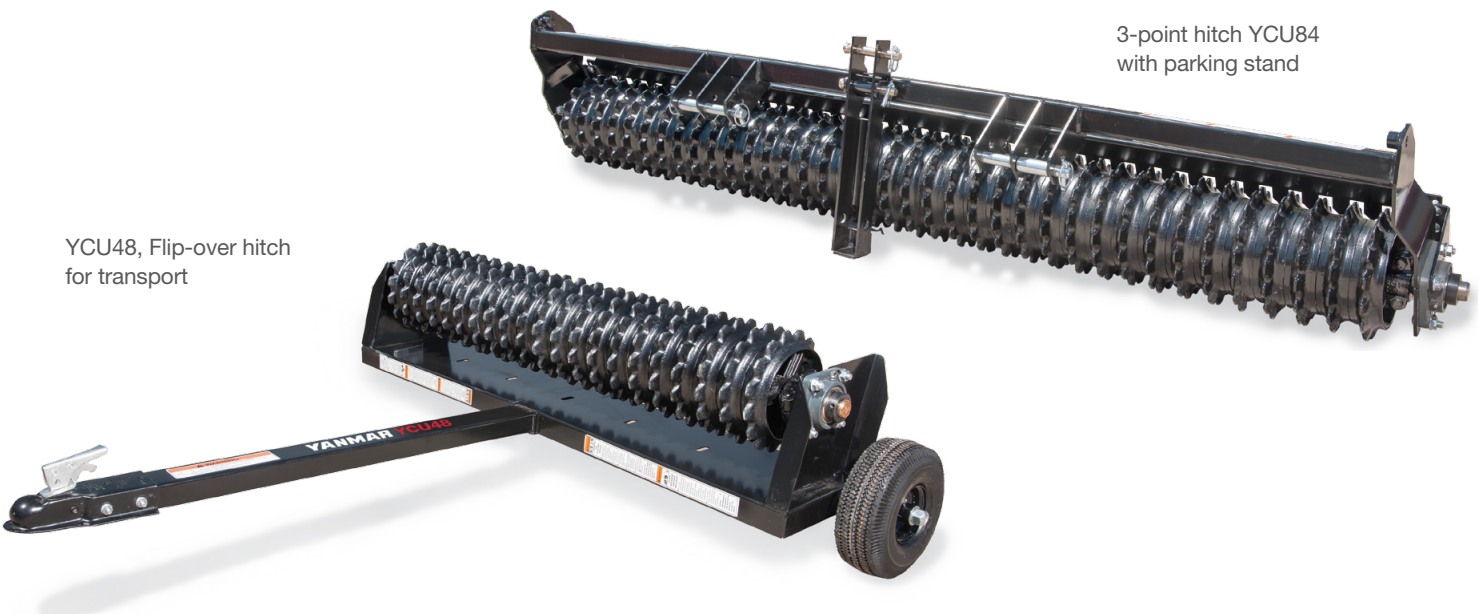

©2017 Yanmar America Corporation. Y117-700

Yanmar has a corporate policy of continuous product improvement and development; therefore, data, specifications, and warranty are subject to change without any advance notice. There may be differences between the specifications and illustrations contained in this publication and the actual equipment. Equipment components produced by other manufacturers may be shown in photographs in this publication for the purpose of illustration only and is not intended as an endorsement of that particular equipment or its suitability. Inspect equipment before using it and be sure it is operating properly. The product depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manuals. Before operating a machine, read, understand, and follow all instructions in the manual and on the machine. Yanmar disclaims all representations, express or implied, or any liability from the use of this publication.