

STANDARD DUTY

LANDSCAPE RAKES

FEATURES

Standard duty and premium duty options.

Strong and durable.



With so many uses, it seems insulting to just call it a rake.

YANMAR SUB-COMPACT LANDSCAPE RAKE - YLR104

The Sub-Compact Landscape Rake levels soil and moves rocks in preparation for planting. The 4' implement's curved steel tines easily clear rocks, roots and other debris. Choose where the debris lands by switching up the angle of the rake. Put the tractor in reverse and the Landscape Rake in reverse position (tines pointing away from tractor) to push away dirt and debris with ease.


YANMAR LANDSCAPE RAKES - YLR205, YLR206, YLR207

The Landscape Rake excels at smoothing, raking and contouring gravel or soil. With its curved C-tines, the Rake will clear rocks and other debris off to the side for easy cleanup. The tines won't destroy your field by digging too deep. Put the tractor in reverse and the Landscape Rake in reverse position (tines pointing away from tractor) to push away dirt and debris with ease. Rotate the rake to choose where the debris lands. An optional wheel kit provides easier maneuverability and maintains a consistent depth.

YANMAR HEAVY-DUTY LANDSCAPE RAKE - YLR306, YLR307

The Heavy-Duty Landscape Rake comes in 6' and 7' models. Curved, thick steel tines tackle those larger projects that require leveling soil and removing rocks for planting. The tines won't destroy your field by digging too deep. Put the tractor in reverse and the Landscape Rake in reverse position (tines pointing away from tractor) to push away dirt and debris with ease.

The rake can be rotated in multiple angles to vary where the debris lands.

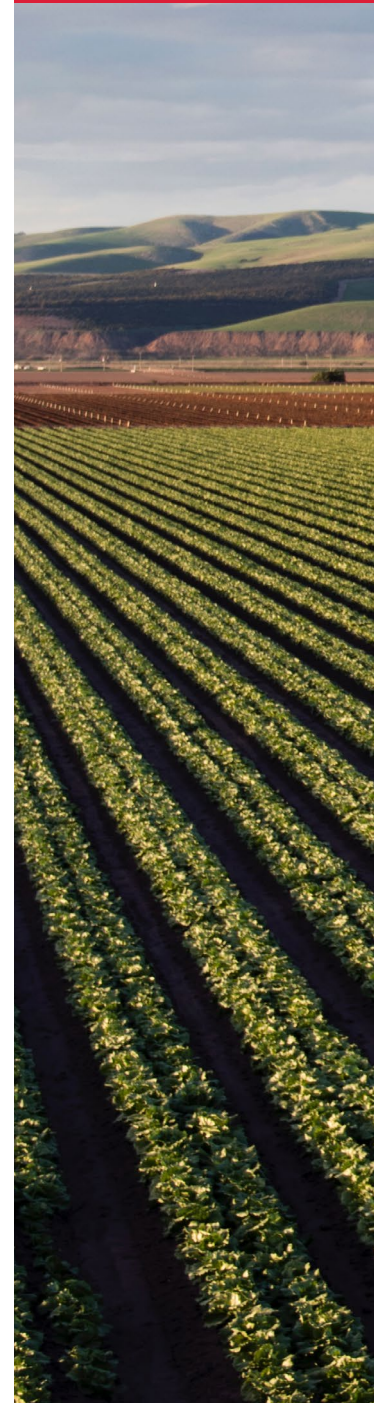

DESCRIPTION	SUB-COMPACT 4' LANDSCAPE RAKE	5' LANDSCAPE RAKE	6' LANDSCAPE RAKE	7' LANDSCAPE RAKE	HEAVY-DUTY 6' LANDSCAPE RAKE	HEAVY-DUTY 7' LANDSCAPE RAKE	
ITEM #	YLR104	YLR205	YLR206	YLR207	YLR306	YLR307	
Tractor horsepower required	15-32	19-40	19-45	25-45	20-60	25-65	
Implement type	Landscape Rake						
Approx. Weight	175 lbs.	195 lbs.	215 lbs.	238 lbs.	272 lbs.	287 lbs.	
Width	48"	60"	72"	84"	72"	84"	
Height	11"	14.5"					
Hitch	Limited Cat1	Cat 1					
Quick hitch compatible	Yes						
Number of teeth	24	30	36	42	36	42	
Teeth spacing	1" Gap						
Angle and Position	5 FWD/ 5 REV up to 45 degree right or left				-		
Forward Raking Angles	-				0, 15, 30 degrees right or left		
Backfill angles	-				0, 15, 30 degrees right or left		

Yanmar has a corporate policy of continuous product improvement and development; therefore, data, specifications, and warranty are subject to change without any advance notice. There may be differences between the specifications and illustrations contained in this publication and the actual equipment. Equipment components produced by other manufacturers may be shown in photographs in this publication for the purpose of illustration only and is not intended as an endorsement of that particular equipment or its suitability. Inspect equipment before using it and be sure it is operating properly. The product depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manuals. Before operating a machine, read, understand, and follow all instructions in the manual and on the machine. Yanmar disclaims all representations, express or implied, or any liability from the use of this publication.